PADAGAS

CATALOG





CONTENT

ABOUT US 3
SWEEPING MACHINES
Sweeping machine PI 4
Sweeping machine PI-BH 5
Sweeping machine PROFI 6
Sweeping machine PROFI H 7
Sweeping machine PIW 8
Sweeping machine PG 9
Sweeping machine PG-BH 10
Sweeping machine MK 11
SNOWPLOUGHS
Light class SSV 12
Light class SSVL 13
Semi-heavy class SSV 14
Semi-heavy class SSVL 15
Semi-heavy class SSV-D 16
Heavy class SSV 17
Heavy class SSVL 18
Economic class SV 19
SAND SPREADERS
Sand spreader SP 20
ATTACHABLE IMPLEMENTS
High-capacity grain bucket KTG 21
Re-handling bucket KTR 21
Construction bucket KTC 22
Excavator ditch bucket V 22
Universal bucket KB-M 23
Grain bucket KB 23
Silage bucket KR-D 24
Bucket with grapple KR 24
Bucket with grapple (sheet nails) KRL 25
Silograb SR 25
Silograb with sheet nails SRL 26
Shear grab SA 26
Pallet forks PS 27
Pallet forks with grapple PS-L 27
Bale grapple RR 28
Bale grapple with hooks for FIBC RR-SD 28
Square bale grapple KRR 29
FIBC rem DR 29
Transportat box TB 30
Frontal 3-point linkage 30
EARTH DRILLS
Earth drill ED-300 31
Earth drill ED-300H 31
MAIZE LEVELLERS
Maize leveller SL 32
Maize leveller SK 33
Maize leveller ST 34
BALE WAGONS
Bale wagon RP 35
FRONTLOADERS
Frontloader FL-360 36
Frontloader FL-380 37
Frontloader FL-400 38
TERMS 39

KEY

Telehandler

Tractor loader

Skid steer

Tractor with front linkage

Forklift

Excavator

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

ABOUT US

JSC V.Padagas ir Ko is a Lithuanian capital, family owned company, founded in 1995. The company started with producing various type of agricultural machinery, but over time our main activity became manufacture of implements for tractors and wheel loaders. For more than 15 years, we are successfully producing and selling implements for agriculture and utility sectors. Today the company is the market leader in the Baltic States specializing in the production of snow cleaners and sweepers.

We design new products, improve their quality. In the modernized factory new and advanced metal-working machinery, robotic welding stations, blasting and painting rooms are installed. All products comply with European directives and are marked with CE sign.

Our products are valued both in Lithuanian and foreign markets.

Why PADAGAS?

- 20 year experience in manufacture
- Modern production technology
- Contemporary design

Sweeping machine PI

TECHNICAL DATA	PI-21	PI-25	PI-29
Total width, mm	2375	2776	3336
Working width, mm	2047	2447	2844
Working width angled, mm	1870	2235	2598
Mechanical angling	30°		
Weight with bracket, kg	450	500	550
Brush ring diameter, mm	600		
Drive	Oil motor		
Required oil flow at 160 bar, l	35	45	50

Optional:

- Hydraulic angling
- Water system

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Sweeping machine PI-BH

TECHNICAL DATA	PI-16BH	PI-21BH	PI-25BH	PI-29BH
Total width, mm	1875	2375	2776	3336
Working width, mm	1547	2047	2447	2844
Working width angled, mm	1413	1870	2235	2598
Mechanical angling	30°			
Weight with bracket and dirt collector, kg	467	535	620	700
Capacity of dirt collector, m^3	0.154	0.203	0.245	0.280
Brush ring diameter, mm	600			
Drive	Oil motor			
Required oil flow at 160 bar, l	25	35	45	50

Optional:

- Hydraulic angling
- Water system
- Side brush

FITS TO

Sweeping machine PROFI

TECHNICAL DATA	PROFI- 2301	PROFI-2601	PROFI-2901
Total width, mm	2634	2940	3240
Working width, mm	2102	2408	2706
Woking width angled, mm	1971	2263	2543
Hydraulic angling	20°		
Weight with bracket and dirt collector, kg	640	670	710
Capacity of dirt collector, m^3	0.287	0.322	0.357
Brush ring diameter, mm	650		
Drive	2 oil motors		
Required oil flow at 160 bar, l	50	50	100

Optional:

- Water system
- Side brush
  (ability to mount 2 side brushes)

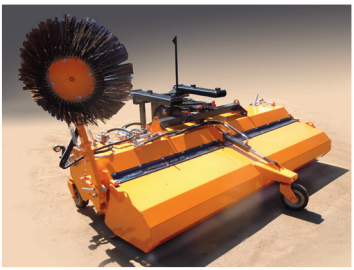

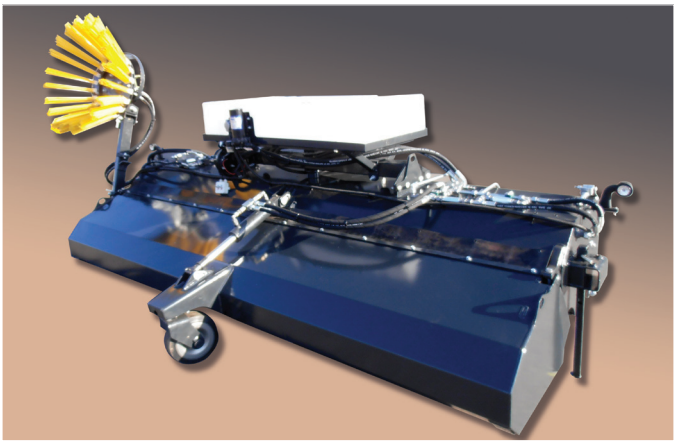

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Sweeping machine PROFI H

TECHNICAL DATA	PROFI H-2101	PROFI H-2501	PROFI H-2801
Total width, mm	2305	2705	3050
Working width, mm	1842	2242	2542
Working width angled, mm	1698	2098	2398
Hydrauli angling	20°		
Weight with bracket and dirt collector, kg	705	839	940
Capacity of dirt collector, m^3	0,35	0,42	0,47
Brush ring diameter, mm	800		
Drive	2 oil motors		
Required oil flow at 160 bar, l	100	100	100

Optional:

- Water system
- Side brusg
  (ability to mount 2 side brushes)
- Side lamps

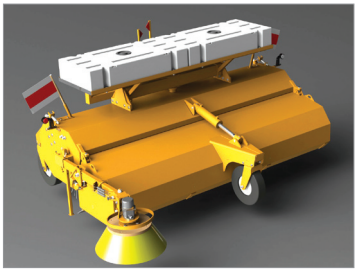

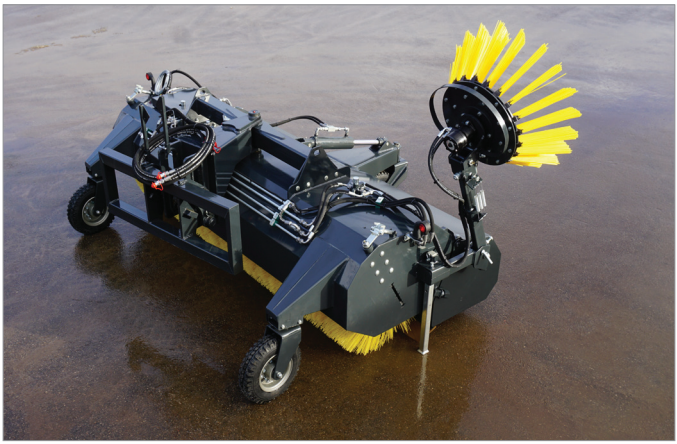

FITS TO

Sweeping machine PIW

TECHNICAL DATA	PIW-150	PIW-250	PIW-300	PIW-330	PIW-350
Total width, mm	1695	2722	3215	3515	3715
Working width, mm	1436	2460	2940	3240	3440
Working width angled, mm	-	2217	2665	2950	3117
Hydraulic angling	-	30°			
Weight with bracket, kg	210	520	525	540	560
Brush ring diameter, mm	800				
Drive	2 oil motors				
Required oil flow at 160 bar, l	25	60	100	100	100

Optional:

- Water system with 1 water tank
- Additional water tank

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Sweeping machine PG

TECHNICAL DATA	PG-15	PG-20	PG-25
Total width, mm	1650	2150	2650
Working width, mm	1394	1893	2400
Working width angled, mm	1223	1655	2090
Mechanical angling	30°		
Weight with bracket, kg	270	300	335
Brush ring diameter, mm	520		
Drive	Mechanical, from PTO shaft		

Optional:

- Hydraulic angling
- Water system

FITS TO

Sweeping machine PG-BH

TECHNICAL DATA	PG-15BH	PG-20BH	PG-25BH
Total width, mm	1650	2150	2650
Working width, mm	1394	1893	2400
Working width angled, mm	1223	1655	2090
Mechanical angling	30°		
Weight with bracket and dirt collector, kg	380	430	475
Capacity of dirt collector, m^3	0,15	0,2	0,25
Brush ring diameter, mm	520		
Drive	Mechanical, from PTO shaft		

Optional:

- Hydraulic angling
- Water system
- Side brush

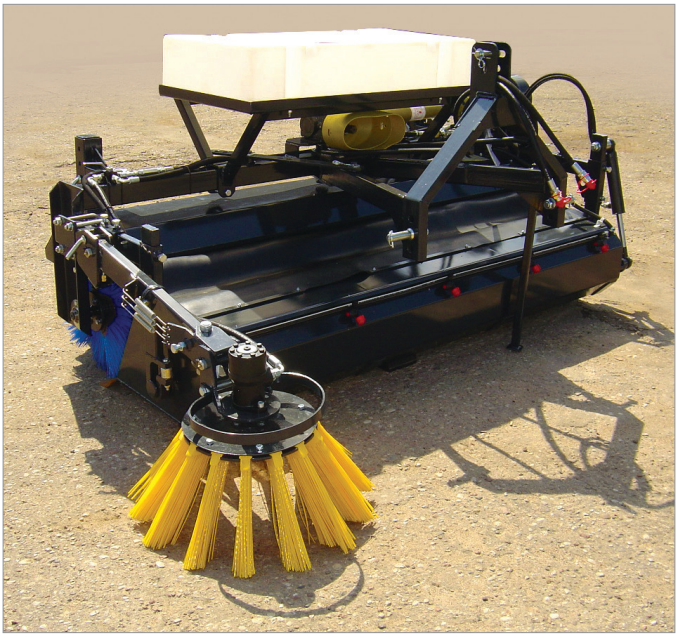

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Sweeping machine MK

TECHNICAL DATA	MK-23
Total width, mm	2450
Working width, mm	2218
Working width angled, mm	2027
Mechanical angling	25°
Weight with bracket, kg	290
Brush ring diameter, mm	600
Drive	Oil motor
Pressure (bar)	Min.35- Max.180
Required oil flow (l/min)	Min.25- Max.50

Optional:

- Hydraulic angling

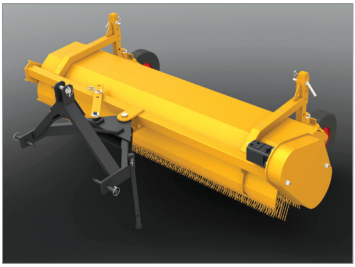

FITS TO

Light class SSV

TECHNICAL DATA	SSV-17L	SSV-21L	SSV-25L
Working width, mm	1685	2111	2565
Working width angled, mm	1519	1903	2310
Hydraulic angling	26°		
Height, mm	616	616	674
Cleaning knife	Hardox		
Weight without bracket, kg	164	199	284

Optional:

- Floating position for bracket
- Side lamps
- Cleaning knife- rubber

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Light class SSVL

TECHNICAL DATA	SSVL-15L	SSVL-17L	SSVL-21L	SSVL-25L
Working width, mm	1497	1697	2123	2577
Working width angled, mm	1225	1412	1760	2132
Working width in position „Y“, mm	1274	1453	1802	2173
Working width in position „V“, mm	1198	1372	1719	2093
Hydraulic rotation	35°			
Height middle/side, mm	678/730	678/730	677/760	677/760
Cleaning knife	Hardox			
Weight without bracket, kg	188	198	237	266

Optional:

- Floating position for bracket
- Hydro-system optimum efficiency
- Cleaning knife - rubber

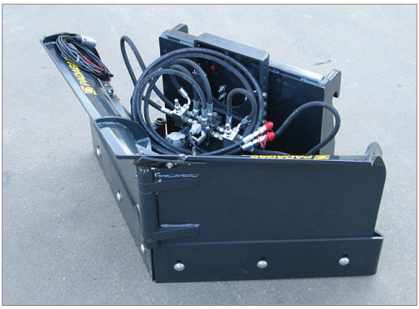

FITS TO

Semi-heavy class SSV

TECHNICAL DATA	SSV-25M	SSV-28M
Working width, mm	2565	2800
Working width angled, mm	2100	2430
Hydraulic rotation	35°	30°
Height, mm	678	678
Cleaning knife	Hardox	
Weight without bracket, kg	460	390

Optional:

- Floating position for bracket
- Side lamps
- Support wheels
- Cleaning knife - rubber

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Semi-heavy class SSVL

TECHNICAL DATA	SSVL-25M	SSVL-28M	SSVL-32M
Working width, mm	2572	2886	3286
Working width angled, mm	2129	2386	2713
Working width in position „Y“, mm	2168	2425	2753
Working width in position „V“, mm	2090	2348	2676
Hydraulic rotation	35°		
Height, mm	779/854	779/854	779/854
Cleaning knife	Hardox		
Weight without bracket, kg	520	550	580

Optional:

- Floating position for bracket
- Side lamps
- Support wheels
- Hydro-system optimum efficiency
- Side knife
- Cleaning knife - rubber

FITS TO

Semi-heavy class SSV-D

TECHNICAL DATA	SSV-26D	SSV-30D
Working width, mm	2666	3066
Working width angled, mm	2308	2655
Hydraulic rotation	30°	
Height middle/side, mm	951/1040	951/1040
Cleaning knife	Hardox	
Weight without bracket, kg	544	622

Optional:

- Support wheels
- Cleaning knife - rubber

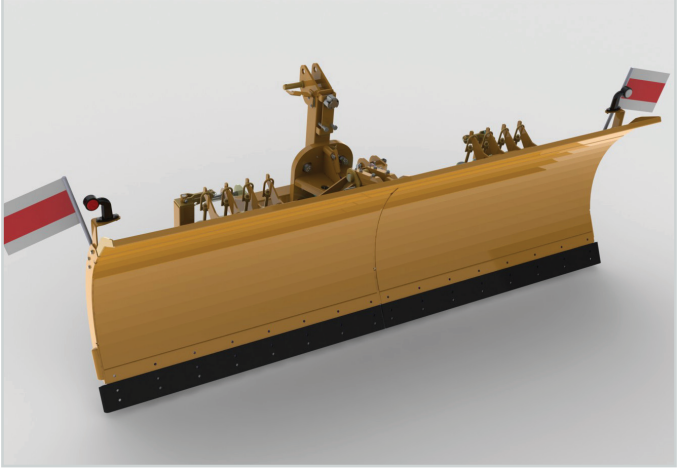

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Heavy class SSV

TECHNICAL DATA	SSV-32	SSV-37	SSV-40
Working width, mm	3277	3675	3951
Working width angled, mm	2677	3033	3256
Hydraulic angling	35°		
Height, mm	1058	1058	1058
Cleaning knife	Hardox		
Weight without bracket, kg	781	800	815

Optional:

- Floating position for bracket with shock absorber
- Side lams
- Support wheels
- Hydro accumulator
- Cleaning knife - rubber

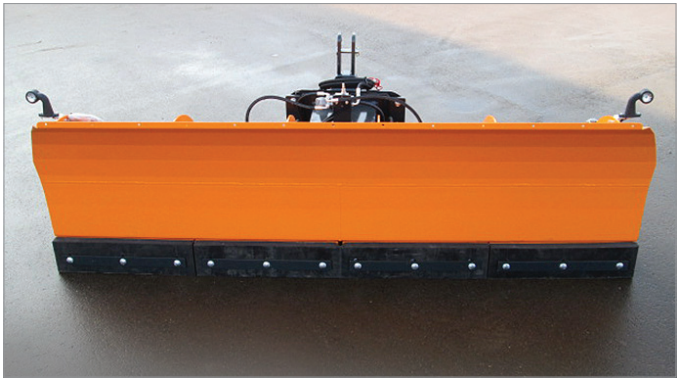

FITS TO

Heavy class SSVL

TECHNICAL DATA	SSVL-32	SSVL-37	SSVL-40
Working width, mm	3296	3694	3970
Working width angled, mm	2722	3048	3274
Working width in position „Y", mm	2758	3084	3310
Working width in position „V", mm	2687	3013	3239
Hydraulic rotation	35°		
Height, mm	1060	1057	1057
Cleaning knife	Hardox		
Weight without bracket, kg	893	918	930

Optional:

- Floating position for bracket with shock absorber
- Side lamps
- Support wheels
- Hydro-system optimum efficiency (diagonal)
- Hydro accumulator
- Side knife
- Cleaning knife - rubber

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Economic class SV

TECHNICAL DATA	SV-26	SV-30
Working width, mm	2600	3120
Working width angled, mm	2260	2700
Mechanical rotation	35°	
Height, mm	620	620
Cleaning knife	Metal	
Weight without bracket, kg	300	340

Optional:

- Floating position for bracket
- Hydraulic rotation
- Cleaning knife - rubber

FITS TO

Sand spreader SP

TECHNICAL DATA	SP-400	SP-800	SP-1000	SP-1500	SP-2000
Width, mm	1600	1800	2400	2600	2570
Length, mm	900	1160	1160	1210	1200
Height, mm	780	880	880	1015	1200
Working width, mm	1400	1580	2180	2360	2360
Capacity, l	400	800	1000	1500	2000
Weight, kg	220	280	410	590	693

Optional:

- 3-point bracket with hydrauli cylinder
- Bracket for loader

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

High-capacity grain bucket KTG

TECHNICAL DATA	KTG-250	KTG-300
Width, mm	2440	2560
Depth, mm	1570	1810
Height, mm	1350	1280
Capacity, m^3	2,5	3
Weight, kg	690	855

FITS TO

Re-handling bucket KTR

TECHNICAL DATA	KTR-150	KTR-200
Width, mm	2350	2440
Depth, mm	1130	1330
Height, mm	989	1060
Capacity, m^3	1,5	1,8
Weight, kg	440	535

FITS TO

Construction bucket KTC

TECHNICAL DATA	KTC-110
Width, mm	2320
Depth, mm	1100
Height, mm	770
Capacity, m^3	1,1
Weight, kg	425

FITS TO

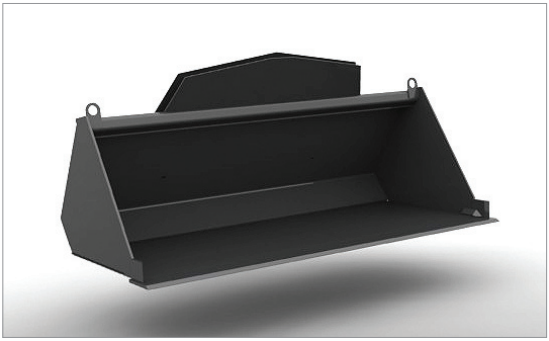

Excavator ditch bucket V

TECHNICAL DATA	V200.100.90
Width (top), mm	1992
Width (bottom), mm	333
Height, mm	1054
Depth, mm	930
Weight, kg	452

FITS TO

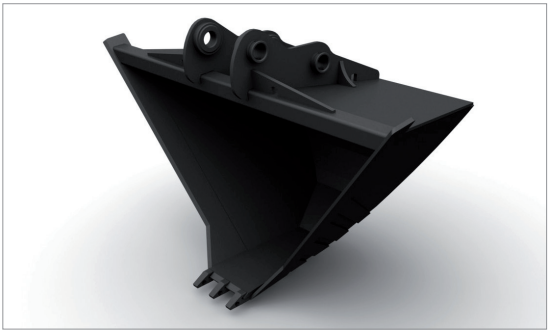

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Universal bucket KB-M

TECHNICAL DATA	KB-150M	KB-200M	KB-230M
Width, mm	1500	2000	2300
Capacity, m^3	0,33	0,46	0,53
Weight, kg	180	206	232

FITS TO

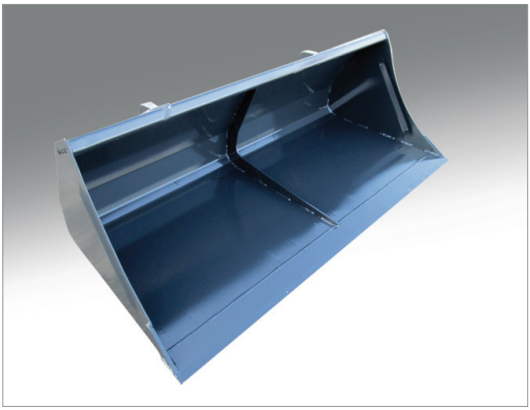

Grain bucket KB

TECHNICAL DATA	KB-200	KB-230
Width, mm	2000	2300
Capacity, m^3	1,04	1,2
Weight, kg	280	310

FITS TO

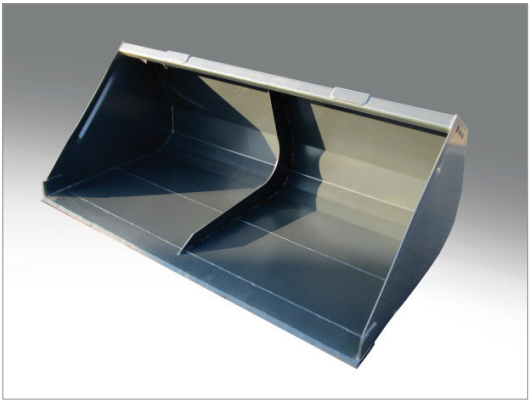

Silage bucket KR-D

TECHNICAL DATA	KR-150D	KR-200D	KR-230D
Width, mm	1500	2000	2300
Capacity, m^3	0,80	1,05	1,25
Weight, kg	450	550	600

FITS TO

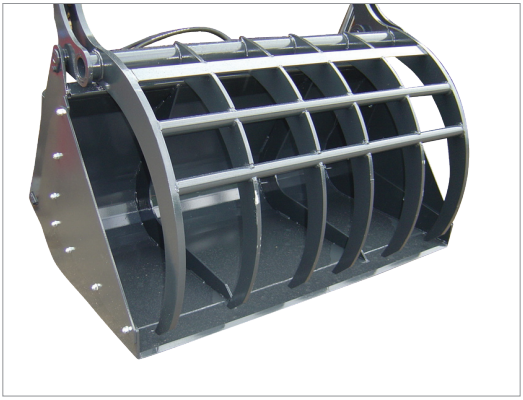

Bucket with grapple KR

TECHNICAL DATA	KR-150	KR-170	KR-200	KR-230
Width, mm	1500	1700	2000	2300
Capacity, m^3	0,65	0,78	1,04	1,17
Weight, kg	376	403	440	473

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Bucket with grapple (sheet nails) KRL

TECHNICAL DATA	KRL-150	KRL-200
Width, mm	1500	2000
Capacity, m³	0,65	1,04
Weight, kg	400	432

FITS TO

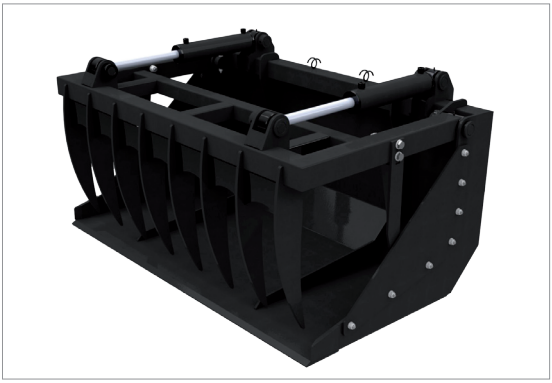

Silograb SR

TECHNICAL DATA	SR-150	SR-170	SR-200	SR-230	SR-250
Width, mm	1500	1700	2000	2300	2500
Capacity, m³	0,65	0,78	1,04	1,17	1,3
Weight, kg	330	346	394	420	440

FITS TO

Silograb with sheet nails SRL

TECHNICAL DATA	SRL-150
Width, mm	1500
Capacity, m^3	0,65
Weight, kg	358

FITS TO

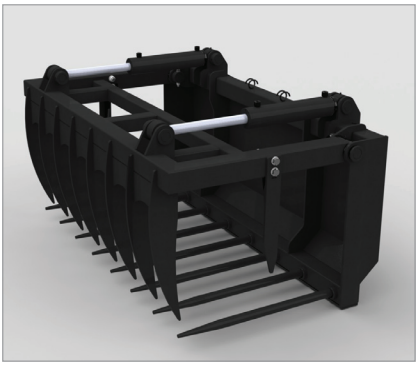

Shear grab SA

TECHNICAL DATA	SA-150	SA-190
Total width, mm	1590	1990
Working width, mm	1500	1900
Height, mm	930	930
Depth, mm	810	810
Capacity, m^3	0,89	1,13
Weight, kg	560	740
Number of hydraulic cylinders, pcs	2	3

FITS TO

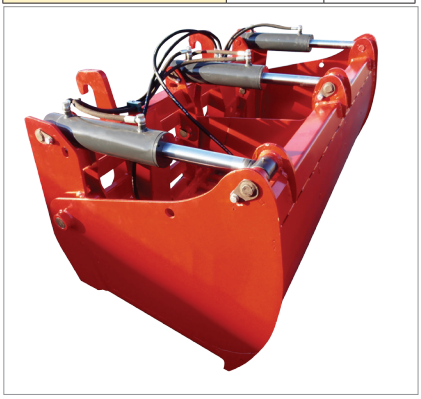

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Pallet forks PS

TECHNICAL DATA	PS-100
Fork length, mm	1200
Lifting power, kg	1600
Weight, kg	90

FITS TO

Pallet forks with grapple PS-L

TECHNICAL DATA	PS-100L
Fork length, mm	1160
Max. height, mm	1200
Lifting power, kg	1600
Weight (without forks), kg	142

FITS TO

Bale grapple RR

TECHNICAL DATA	RR-180
Bale size, mm	1200-1800
Weight, kg	250

FITS TO

Bale grapple with hooks for FIBC RR-SD

TECHNICAL DATA	RR-150SD
Bale size, mm	650-1500
Weight, kg	150

FITS TO

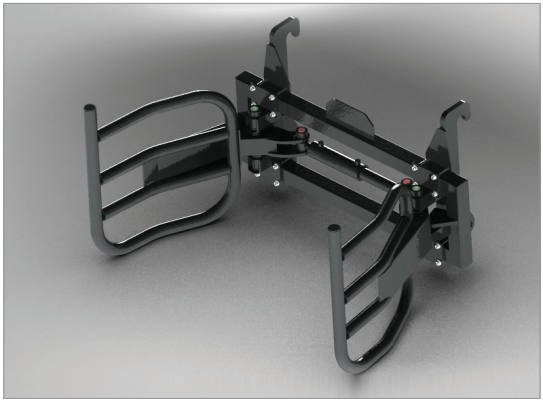

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Square bale grapple KRR

TECHNICAL DATA	KRR 755-2100
Min. bale width, mm	742
Max. bale width, mm	2102
Height, mm	1198
Weight, kg	425

FITS TO

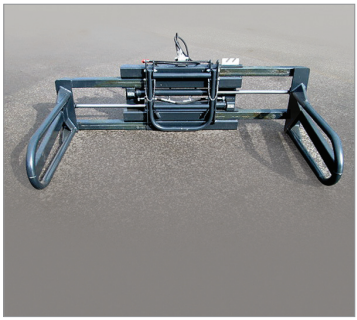

FIBC rem DR

TECHNICAL DATA	DR-100
Height, mm	1833
Lifting power, kg	800-1000
Weight, kg	95

FITS TO

Transportat box TB

TECHNICAL DATA	TB-100	TB-125	TB-150
Width, mm	1000	1250	1500
Capacity, m^3	0,24	0,3	0,36
Emptying	mechanical		
Angled while emptying	45°		
Weight, kg	63	70	77

FITS TO



Frontal 3-point linkage

- We produce frontal 3-point linkages for various tractors.

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Earth drill ED

TECHNICAL DATA	ED-300
Boring depth, mm	1000
Boring diameter, mm	According the drill diameter
Drive	mechanical
Weight, kg	200

FITS TO

Optional:

DRILLS
- 120 mm
- 200 mm
- 300 mm
- 450 mm

Earth drill ED-H

TECHNICAL DATA	ED-300H
Boring depth, mm	1000
Boring diameter, mm	According the drill diameter
Angling	Hydraulic
Drive	Mechanical
Weight, kg	200

FITS TO

Optional:

DRILLS
- 120 mm
- 200 mm
- 300 mm
- 450 mm

Maize leveller SL

TECHNICAL DATA	SL-450	SL-500
Transport width, mm	3000	3000
Working width, mm	4500	5000
Blade height, mm	1150	1150
Weight, kg	900	960

Optional:

- Rise (grille, 40 cm)
- Side lamps
- Lighting

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Maize leveller SK

TECHNICAL DATA	SK-400	SK-500
Transport width, mm	2340	2950
Working width, mm	4000	5000
Blade height, mm	1100	1100
Weight, kg	920	1030

Optional:

- Hardox support plates
- Rise (grille, 40 cm)
- Side lamps
- Lighting

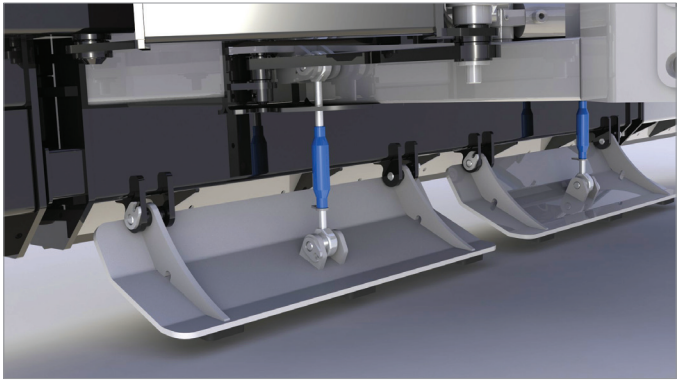

FITS TO

Maize leveller ST

TECHNICAL DATA	ST-300
Transport width, mm	3000
Working width, mm	3000
Blade height, mm	1000
Weight, kg	290

Optional:

- Side lamps

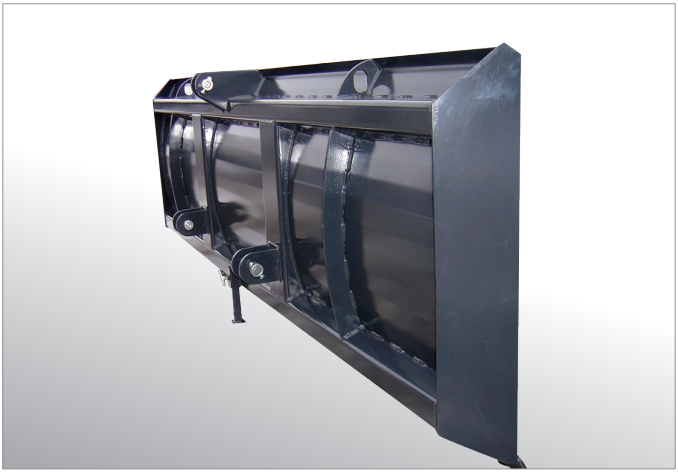

FITS TO

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Bale wagon RP

TECHNICAL DATA	RP-6000
Length, mm	7455
Width, mm	2360
Bale diameter, mm	150-180
Bale quantity, pcs	3-4
Weight, kg	1000

FITS TO

Frontloader FL-360

Lifting height - 3,6 m. Lifting power - 1860 kg.

Lifting force daN (kg):

	PRESSURE	
	145 bar	180 bar
M_1	1100	1410
M_2	950	1190
N_1	1410	1800
N_2	1210	1530
Q_1	1710	2190
Q_2	1470	1860

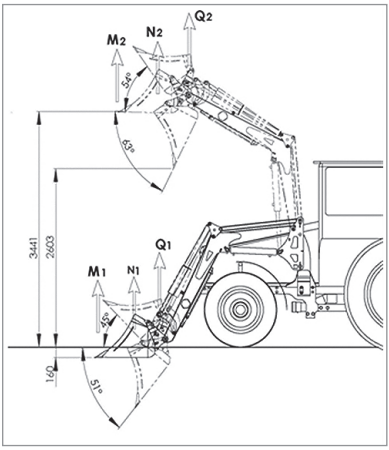

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

Frontloader FL-380

Lifting height - 3,8 m. Lifting power - 1860 kg.

Lifting force daN (kg):

	PRESSURE	
	145 bar	180 bar
M_1	1100	1410
M_2	950	1190
N_1	1410	1800
N_2	1210	1530
Q_1	1710	2190
Q_2	1470	1860

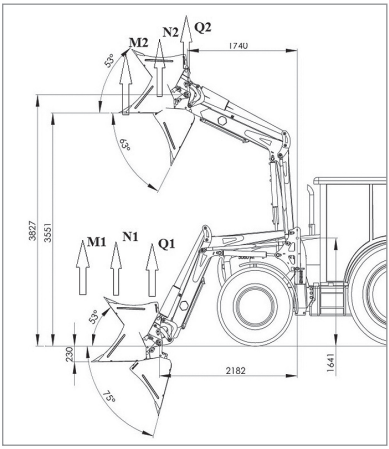

Frontloader FL-400

Lifting height - 4 m. Lifting power - 2100 kg.

Lifting force daN (kg):

	PRESSURE	
	145 bar	180 bar
M_1	1300	1670
M_2	1050	1330
N_1	1570	2020
N_2	1310	1670
Q_1	1900	2440
Q_2	1650	2100

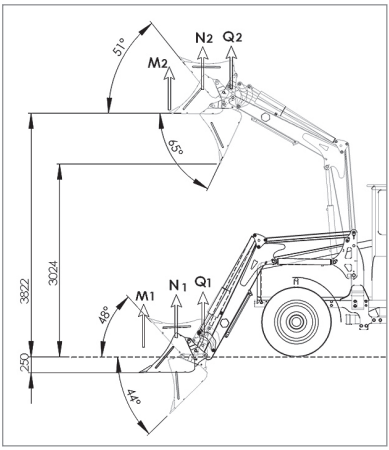

JSC V. Padagas ir Ko, Birutės g. 57B, LT-90112 Plungė, Lithuania. Tel. +370 448 71863, fax +370 448 71891, info@padagas.lt

ORDERS

Orders must be confirmed either by email, fax or post within three working days. Orders will not be processed without official confirmation.

PRICES

The price list replaces and cancels all those issued before. All prices are exclusive of VAT and do not include carriage unless otherwise agreed.

SPECIFICATIONS

All capacities, sizes and weights in this brochure are approximate. JSC V.Padagas ir Ko reserves the right to alter specification without notice or consultation.

DELIVERY

The delivery time is set individually for every order. The Goods delivery shall be executed by means under the terms Ex Works, Plunge, unless otherwise agreed.

WARRANTY

The manufacturer guarantees the perfect functioning of Goods if it is operated in accordance with its manual and technical requirements. Throughout the warranty period observed shortcomings during the operation are remedied within 14 days or other agreed period of spreaders transmission warranty work conducting enterprise.

The warranty does not cover components and parts that wear out under normal operating conditions before the expiry of the warranty period. In addition, the warranty does not cover mechanical and other damages arising from the misuse and improper adjustment or maintenance carried out.

Provisions & Use of Work Equipment Regulations (2006)

JSC V. **Padagas ir Ko** produced machinery correspond
to European directive 2006/42/EB.

A copy of our full terms and conditions of sale
is available from our sales office.



JSC V. Padagas ir Ko
Birutės str. 57B,
LT-90112 Plungė, Lithuania
Tel. +370 448 71863
Fax +370 448 71891
info@padagas.lt

www.padagas.lt